


## 罩极电机 Shaded Pole motors



| Model          | Bearing<br>● BALL<br>○ Sleeve | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | OUT PUT<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(m <sup>3</sup> /h) | FAN<br>BLADE<br>(mm) | Weight<br>(kg) | A  | B    | C    | D    |
|----------------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|--------------------|----------------|------------------------------------|----------------------|----------------|----|------|------|------|
|                |                               |                            |               |                           |                                 |                    |                |                                    |                      |                |    |      |      |      |
| JD-YZF2-13-18  | ○ ●                           | 220/240                    | 50/60         | 0.14                      | 20                              | 2                  | 1300           | 205                                | ∅ 172                | 0.8            | 13 | 13.5 | 43   | 78   |
| JD-YZF5-13-18  | ○ ●                           | 220/240                    | 50/60         | 0.20                      | 29                              | 5                  | 1300           | 455                                | ∅ 200                | 0.8            | 13 | 13.5 | 43   | 78   |
| JD-YZF6-13-18  | ○ ●                           | 110/120                    | 60            | 0.55                      | 33                              | 6                  | 1550           | 510                                | ∅ 200                | 0.8            | 13 | 13.5 | 43   | 78   |
| JD-YZF7-20-18  | ○ ●                           | 220/240                    | 50/60         | 0.23                      | 32                              | 7                  | 1300           | 640                                | ∅ 230                | 1.1            | 19 | 14   | 43.5 | 84.5 |
| JD-YZF10-20-18 | ○ ●                           | 220/240                    | 50/60         | 0.25                      | 36                              | 10                 | 1300           | 650                                | ∅ 230                | 1.1            | 19 | 14   | 43.5 | 84.5 |
| JD-YZF10-20-18 | ○ ●                           | 110/120                    | 60            | 0.80                      | 55                              | 10                 | 1550           | 800                                | ∅ 230                | 1.1            | 19 | 14   | 43.5 | 84.5 |
| JD-YZF12-20-18 | ○ ●                           | 220/240                    | 50/60         | 0.36                      | 54                              | 12                 | 1300           | 690                                | ∅ 230                | 1.1            | 19 | 14   | 43.5 | 84.5 |
| JD-YZF16-25-18 | ○ ●                           | 220/240                    | 50/60         | 0.45                      | 60                              | 16                 | 1300           | 760                                | ∅ 254                | 1.4            | 25 | 15.5 | 45   | 92   |
| JD-YZF18-25-18 | ○ ●                           | 110/120                    | 60            | 1.01                      | 70                              | 18                 | 1550           | 940                                | ∅ 254                | 1.4            | 25 | 15.5 | 45   | 92   |

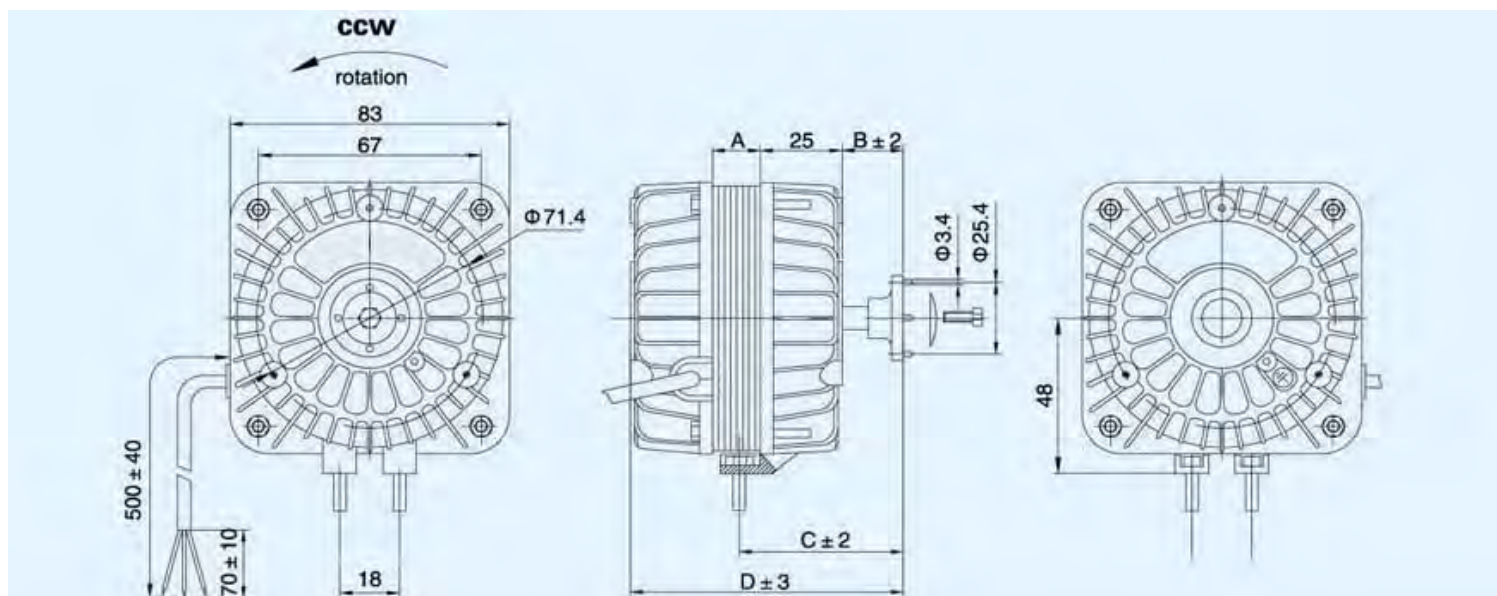

- \* all model could be customized on voltage or any other requirements to fit your need
- \* [http:// www.jingdafan.com](http://www.jingdafan.com)