


罩极电机 Shaded Pole motors



Model	Bearing ● BALL ○ Sleeve	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	OUT PUT (WATTS)	Speed (RPM)	Air Flow (m ³ /h)	FAN BLADE (mm)	Weight (kg)	A	B	C	D	E
JD-YZF2-13-18/26	○ ●	220/240	50/60	0.14	20	2	1300	205	Ø 172	0.8	13	15	46	83	45
JD-YZF5-13-18/26	○ ●	220/240	50/60	0.20	29	5	1300	455	Ø 200	0.8	13	15	46	83	45
JD-YZF6-13-18/26	○ ●	110/120	60	0.55	33	6	1550	510	Ø 200	0.8	13	15	46	83	45
JD-YZF7-20-18/26	○ ●	220/240	50/60	0.23	32	7	1300	640	Ø 230	1.1	19	15	46	89	51
JD-YZF10-20-18/26	○ ●	220/240	50/60	0.25	36	10	1300	650	Ø 230	1.1	19	15	46	89	51
JD-YZF10-20-18/26	○ ●	110/120	60	0.80	55	10	1550	800	Ø 230	1.1	19	15	46	89	51
JD-YZF12-20-18/26	○ ●	220/240	50/60	0.36	54	12	1300	690	Ø 230	1.1	19	15	46	89	51
JD-YZF16-25-18/26	○ ●	220/240	50/60	0.45	60	16	1300	760	Ø 254	1.4	25	14	45	94	56
JD-YZF18-25-18/26	○ ●	110/120	60	1.01	70	18	1550	940	Ø 254	1.4	25	14	45	94	56
JD-YZF18-30-18/26	○ ●	220/240	50/60	0.50	70	18	1300	1000	Ø 254	1.5	30	17.5	48.5	102.5	64.5
JD-YZF18-30-18/26	○ ●	110/120	60	1.10	75	18	1450	1000	Ø 254	1.5	30	17.5	48.5	102.5	64.5
JD-YZF25-40-18/26	○ ●	220/240	50/60	0.70	90	25	1300	1030	Ø 300	1.8	40	18.5	49.5	113.5	75.5
JD-YZF25-40-18/26	○ ●	110/120	60	1.40	100	25	1450	1030	Ø 300	1.8	40	18.5	49.5	113.5	75.5
JD-YZF34-45-18/26	○ ●	220/240	50/60	0.85	110	34	1300	1210	Ø 300	2.0	45	22.5	53.5	122.5	84.5
JD-YZF34-45-18/26	○ ●	110/120	60	1.50	110	34	1450	1210	Ø 300	2.0	45	22.5	53.5	122.5	84.5

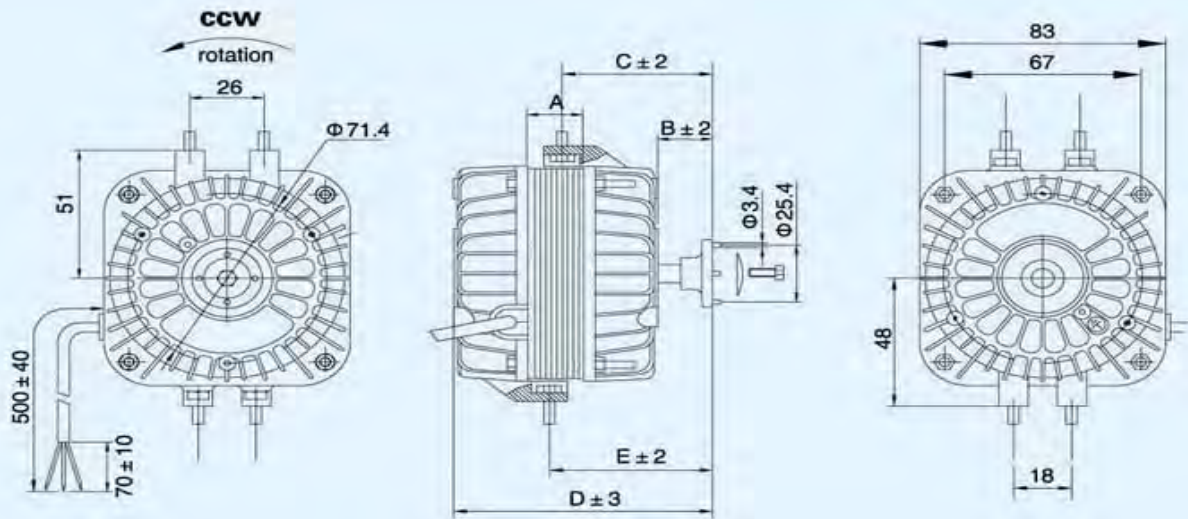

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)