
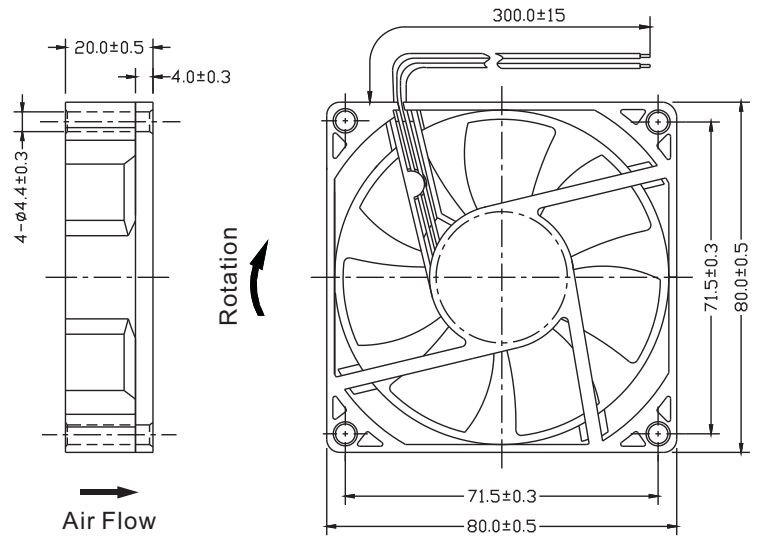


80X80X20mm

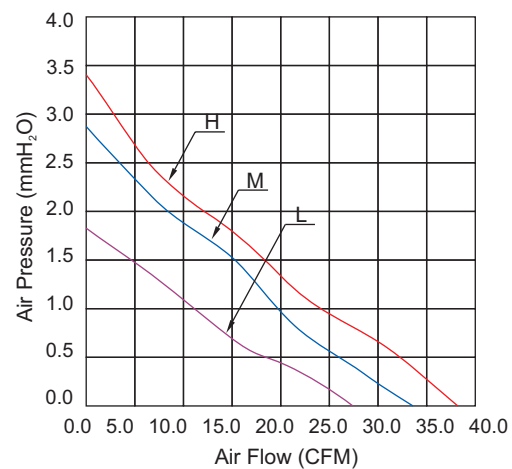

Performance Curves

Unit: mm

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
8020D12HS	Sleeve	12	6.0~13.8	0.23	3,500	38.8	3.3	40					64
8020D12MS			6.0~13.8	0.17	3,000	33.5	2.4	35					
8020D12LS			6.0~13.8	0.13	2,500	27.6	1.7	30					
8020D12HB	Ball		6.0~13.8	0.23	3,500	38.8	3.3	40					
8020D12MB			6.0~13.8	0.17	3,000	33.5	2.4	35					
8020D12LB			6.0~13.8	0.13	2,500	27.6	1.7	30					
8020D24HS	Sleeve	24	12.0~27.6	0.21	3,500	38.8	3.3	40					64
8020D24MS			12.0~27.6	0.14	3,000	33.5	2.4	35					
8020D24LS			12.0~27.6	0.12	2,500	27.6	1.7	30					
8020D24HB	Ball		12.0~27.6	0.21	3,500	38.8	3.3	40					
8020D24MB			12.0~27.6	0.14	3,000	33.5	2.4	35					
8020D24LB			12.0~27.6	0.12	2,500	27.6	1.7	30					

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)