
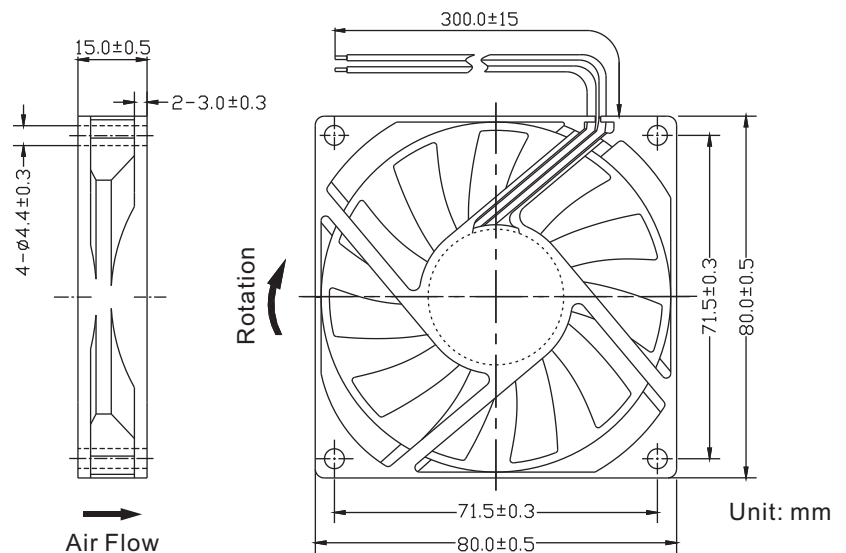


80X80X15mm

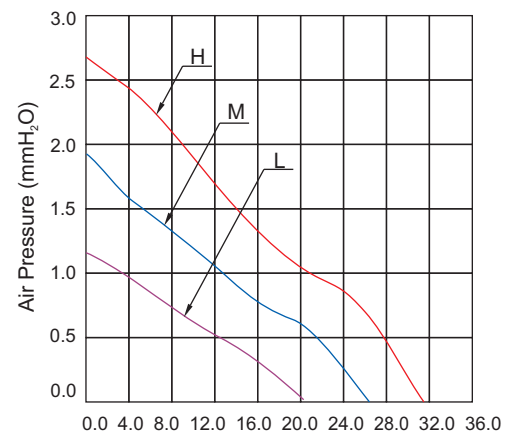

Performance Curves Air Flow (CFM)

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
8015D12HS	Sleeve	12	6.0~13.8	0.17	3,000	31.2	2.6	35	•	•		•	54
8015D12MS			6.0~13.8	0.14	2,500	26.0	1.9	30	•	•		•	
8015D12LS			6.0~13.8	0.09	2,000	20.8	1.2	25	•	•		•	
8015D12HB	Ball		6.0~13.8	0.17	3,000	31.2	2.6	35	•	•		•	
8015D12MB			6.0~13.8	0.14	2,500	26.0	1.9	30	•	•		•	
8015D12LB			6.0~13.8	0.09	2,000	20.8	1.2	25	•	•		•	
8015D24HS	Sleeve	24	12.0~27.6	0.15	3,000	31.2	2.6	35	•	•			54
8015D24MS			12.0~27.6	0.13	2,500	26.0	1.9	30	•	•			
8015D24LS			12.0~27.6	0.10	2,000	20.8	1.2	25	•	•			
8015D24HB	Ball		12.0~27.6	0.15	3,000	31.2	2.6	35	•	•			
8015D24MB			12.0~27.6	0.13	2,500	26.0	1.9	30	•	•			
8015D24LB			12.0~27.6	0.10	2,000	20.8	1.2	25	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)