
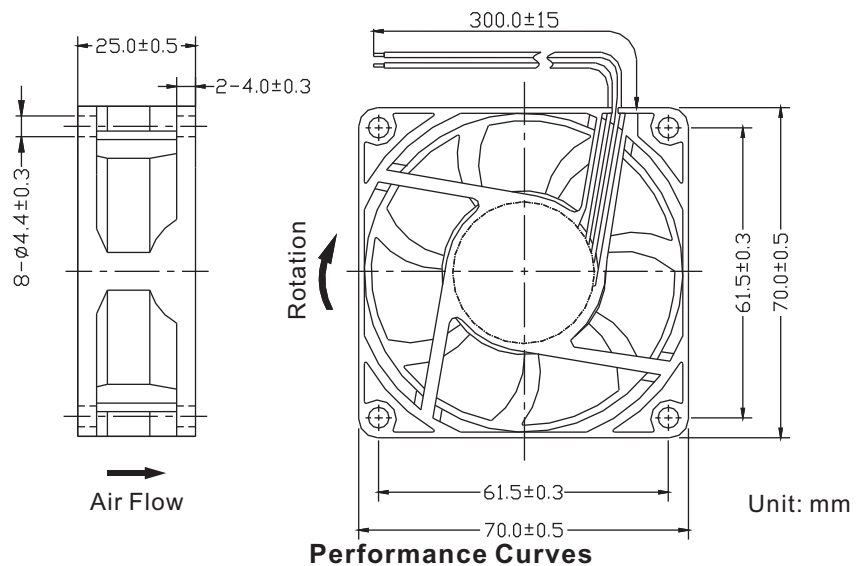


70X70X25mm

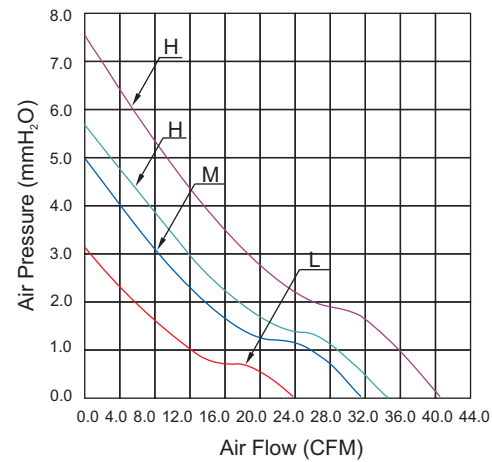

Performance Curves

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight	
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g	
7025D5HS	leeve	5	3.5~5.75	0.70	4,500	34.6	5.7	39	•	•			65	
7025D5MS			3.5~5.75	0.55	4,000	31.5	4.9	36	•	•				
7025D5LS			3.5~5.75	0.30	3,000	23.7	3.1	28	•	•				
7025D5HB	Ball		3.5~5.75	0.70	4,500	34.6	5.7	39	•	•				
7025D5MB			3.5~5.75	0.55	4,000	31.5	4.9	36	•	•				
7025D5LB			3.5~5.75	0.30	3,000	23.7	3.1	28	•	•				
7025D12HS	Sleeve	12	6.0~13.8	0.40	5,100	40.6	7.5	42	•	•		•		
7025D12MS			6.0~13.8	0.20	4,000	31.5	4.9	36	•	•		•		
7025D12LS			6.0~13.8	0.15	3,000	23.7	3.1	28	•	•		•		
7025D12HB	Ball		6.0~13.8	0.40	5,100	40.6	7.5	42	•	•		•		
7025D12MB			6.0~13.8	0.20	4,000	31.5	4.9	36	•	•		•		
7025D12LB			6.0~13.8	0.15	3,000	23.7	3.1	28	•	•		•		
7025D24HS	Sleeve	24	12.0~27.6	0.22	5,100	40.6	7.5	42	•	•				
7025D24MS			12.0~27.6	0.12	4,000	31.5	4.9	36	•	•				
7025D24LS			12.0~27.6	0.10	3,000	23.7	3.1	28	•	•				
7025D24HB	Ball		12.0~27.6	0.20	5,100	40.6	7.5	42	•	•				
7025D24MB			12.0~27.6	0.12	4,000	31.5	4.9	36	•	•				
7025D24LB			12.0~27.6	0.10	3,000	23.7	3.1	28	•	•				

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)