
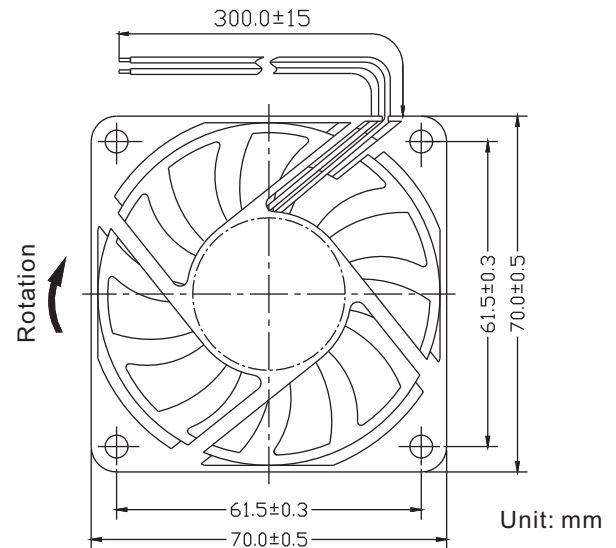


70X70X15mm

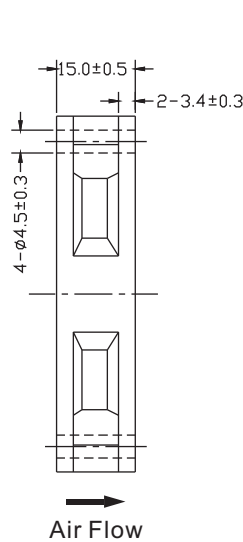


Unit: mm

General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+): Red (-): Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

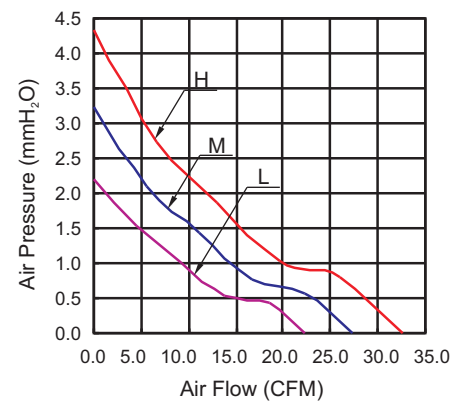Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
7015D12HS	Sleeve	12	6.0~13.8	0.35	4,200	32.5	4.3	40	●	●		●	48
7015D12MS			6.0~13.8	0.25	3,600	27.2	3.2	35	●	●		●	
7015D12LS			6.0~13.8	0.16	3,000	22.2	2.2	31	●	●		●	
7015D12HB	Ball		6.0~13.8	0.35	4,200	32.5	4.3	40	●	●		●	
7015D12MB			6.0~13.8	0.25	3,600	27.2	3.2	35	●	●		●	
7015D12LB			6.0~13.8	0.16	3,000	22.2	2.2	31	●	●		●	
7015D24HS	Sleeve	24	12.0~27.6	0.25	4,200	32.5	4.3	40	●	●			
7015D24MS			12.0~27.6	0.16	3,600	27.2	3.2	35	●	●			
7015D24LS			12.0~27.6	0.12	3,000	22.2	2.2	31	●	●			
7015D24HB	Ball		12.0~27.6	0.25	4,200	32.5	4.3	40	●	●			
7015D24MB			12.0~27.6	0.16	3,600	27.2	3.2	35	●	●			
7015D24LB			12.0~27.6	0.12	3,000	22.2	2.2	31	●	●			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)