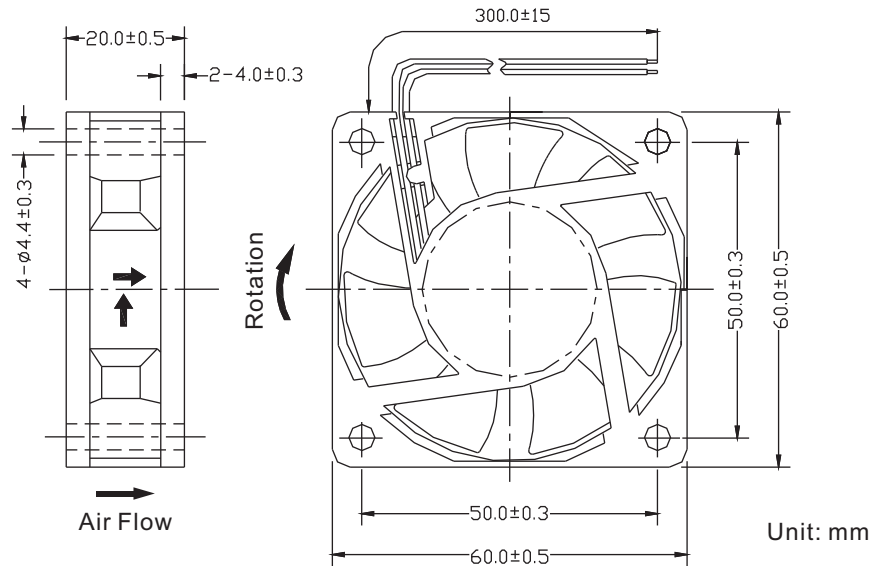



60X60X20mm

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

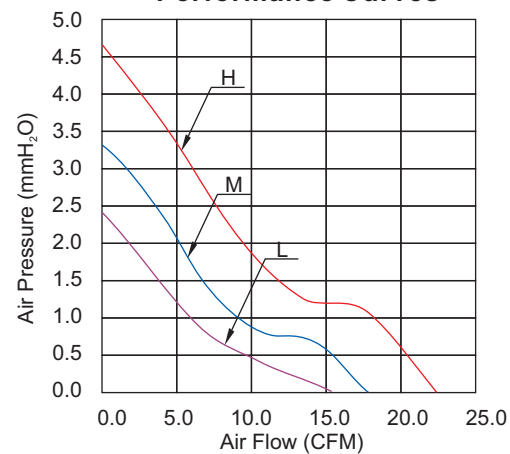Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
6020D12HS	Sleeve	12	6.0~13.8	0.16	4,200	22.3	4.7	35	•	•	•	•	50
6020D12MS			6.0~13.8	0.12	3,500	18.5	3.3	29	•	•	•	•	
6020D12LS			6.0~13.8	0.08	3,000	15.7	2.4	26	•	•	•	•	
6020D12HB	Ball		6.0~13.8	0.16	4,200	22.3	4.7	35	•	•	•	•	
6020D12MB			6.0~13.8	0.12	3,500	18.5	3.3	29	•	•	•	•	
6020D12LB			6.0~13.8	0.08	3,000	15.7	2.4	26	•	•	•	•	
6020D24HS	Sleeve	24	12.0~27.6	0.13	4,200	22.3	4.7	35	•	•			50
6020D24MS			12.0~27.6	0.10	3,500	18.5	3.3	29	•	•			
6020D24LS			12.0~27.6	0.08	3,000	15.7	2.4	26	•	•			
6020D24HB	Ball		12.0~27.6	0.13	4,200	22.3	4.7	35	•	•			
6020D24MB			12.0~27.6	0.10	3,500	18.5	3.3	29	•	•			
6020D24LB			12.0~27.6	0.08	3,000	15.7	2.4	26	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)