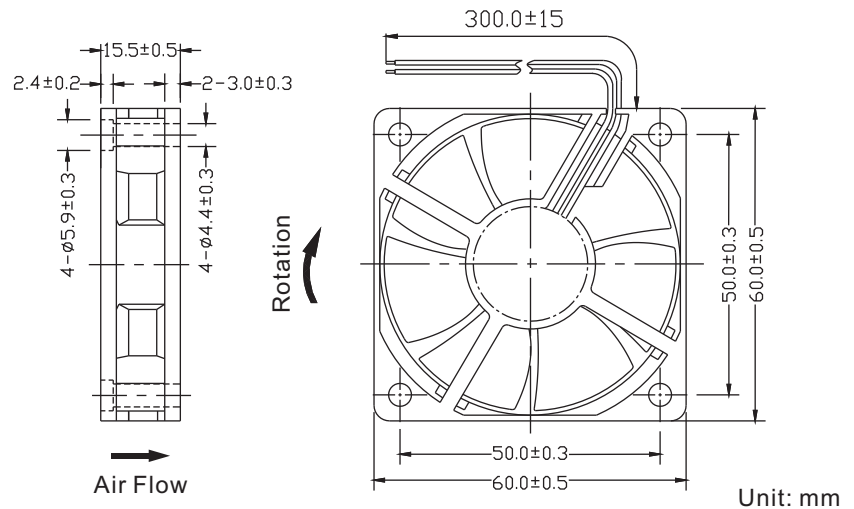



60X60X15mm

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

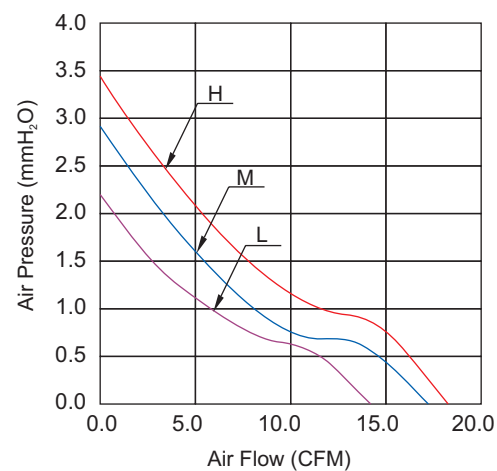Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
6015D5HS	Sleeve	5	3.5~5.75	0.40	4,500	18.6	3.4	35	•	•			34
6015D5MS			3.5~5.75	0.25	4,000	16.4	2.8	32	•	•			
6015D5LS			3.5~5.75	0.15	3,500	14.4	2.2	29	•	•			
6015D5HB	Ball		3.5~5.75	0.40	4,500	18.6	3.4	35	•	•			
6015D5MB			3.5~5.75	0.25	4,000	16.4	2.8	32	•	•			
6015D5LB			3.5~5.75	0.15	3,500	14.4	2.2	29	•	•			
6015D12HS	Sleeve	12	6.0~13.8	0.17	4,500	18.6	3.4	35	•	•	•	•	
6015D12MS			6.0~13.8	0.15	4,000	16.4	2.8	32	•	•	•	•	
6015D12LS			6.0~13.8	0.11	3,500	14.4	2.2	29	•	•	•	•	
6015D12HB	Ball		6.0~13.8	0.17	4,500	18.6	3.4	35	•	•	•	•	
6015D12MB			6.0~13.8	0.15	4,000	16.4	2.8	32	•	•	•	•	
6015D12LB			6.0~13.8	0.11	3,500	14.4	2.2	29	•	•	•	•	
6015D24HS	Sleeve	24	12.0~27.6	0.15	4,500	18.6	3.4	35	•	•			
6015D24MS			12.0~27.6	0.10	4,000	16.4	2.8	32	•	•			
6015D24LS			12.0~27.6	0.08	3,500	14.4	2.2	29	•	•			
6015D24HB	Ball		12.0~27.6	0.15	4,500	18.6	3.4	35	•	•			
6015D24MB			12.0~27.6	0.10	4,000	16.4	2.8	32	•	•			
6015D24LB			12.0~27.6	0.08	3,500	14.4	2.2	29	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)