
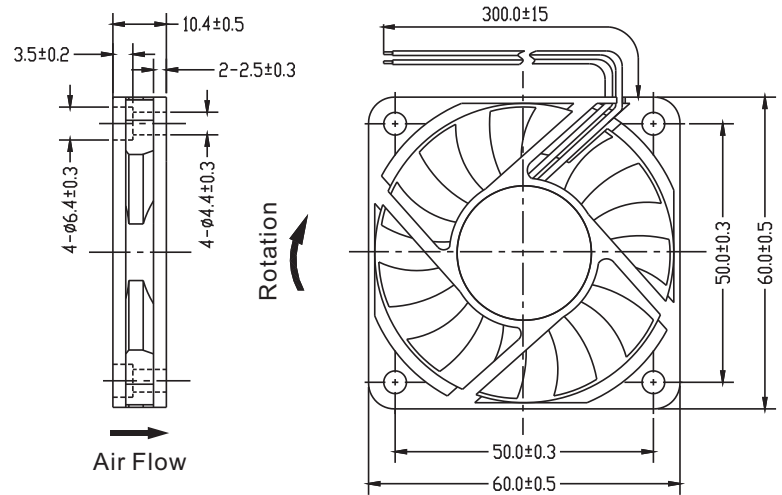


60X60X10mm

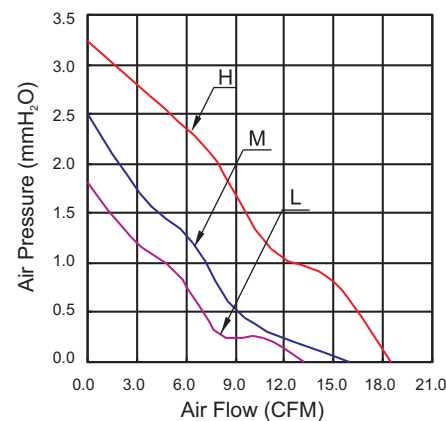

Performance Curves

Unit: mm

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
6010D5HS	Sleeve	5	3.5~5.75	0.35	4,200	18.5	3.2	36	•	•			23
6010D5MS			3.5~5.75	0.22	3,600	15.9	2.5	31	•	•			
6010D5LS			3.5~5.75	0.17	3,000	13.2	1.8	27	•	•			
6010D5HB	Ball		3.5~5.75	0.35	4,200	18.5	3.2	36	•	•			
6010D5MB			3.5~5.75	0.22	3,600	15.9	2.5	31	•	•			
6010D5LB			3.5~5.75	0.17	3,000	13.2	1.8	27	•	•			
6010D12HS	Sleeve	12	6.0~13.8	0.22	4,200	18.5	3.2	36	•	•			
6010D12MS			6.0~13.8	0.17	3,600	15.9	2.5	31	•	•			
6010D12LS			6.0~13.8	0.14	3,000	13.2	1.8	27	•	•			
6010D12HB	Ball		6.0~13.8	0.22	4,200	18.5	3.2	36	•	•			
6010D12MB			6.0~13.8	0.17	3,600	15.9	2.8	31	•	•			
6010D12LB			6.0~13.8	0.14	3,000	13.2	1.8	27	•	•			
6010D24HS	Sleeve	24	12.0~27.6	0.11	4,200	18.5	3.2	36	•	•			
6010D24MS			12.0~27.6	0.09	3,600	15.9	2.5	31	•	•			
6010D24LS			12.0~27.6	0.07	3,000	13.2	1.8	27	•	•			
6010D24HB	Ball		12.0~27.6	0.11	4,200	18.5	3.2	36	•	•			
6010D24MB			12.0~27.6	0.09	3,600	15.9	2.5	31	•	•			
6010D24LB			12.0~27.6	0.07	3,000	13.2	1.8	27	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)