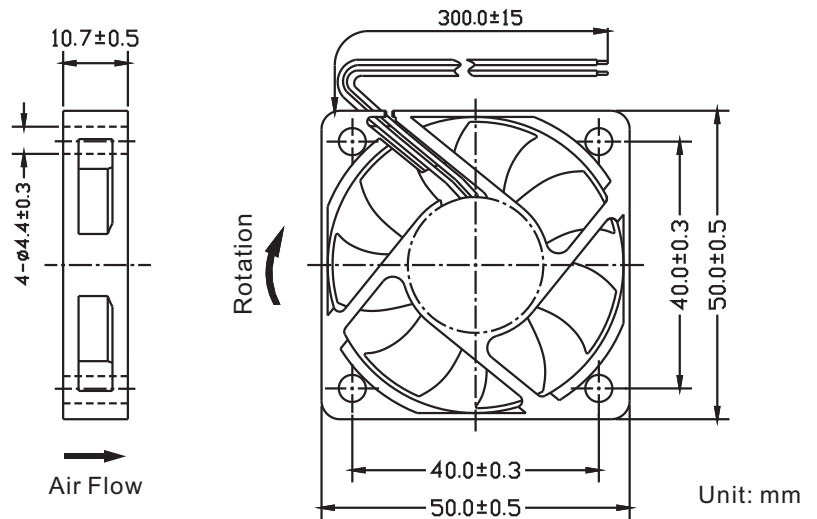



50X50X10mm

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

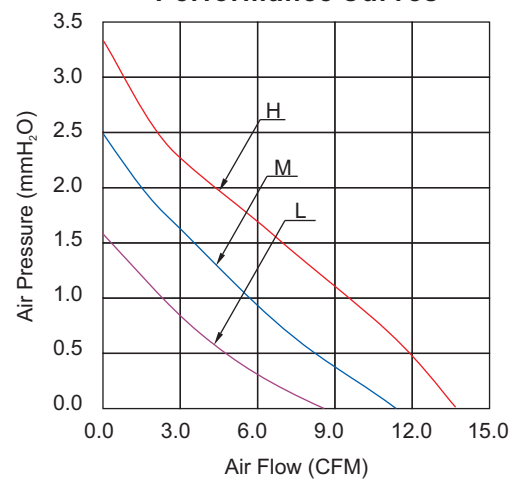Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
5010D5HS	Sleeve	5	3.5~5.75	0.30	5,300	13.2	3.3	32	•	•			19
5010D5MS			3.5~5.75	0.20	4,500	11.0	2.5	28	•	•			
5010D5LS			3.5~5.75	0.14	3,500	8.6	1.6	22	•	•			
5010D5HB	Ball		3.5~5.75	0.30	5,300	13.2	3.3	32	•	•			
5010D5MB			3.5~5.75	0.20	4,500	11.0	2.5	28	•	•			
5010D5LB			3.5~5.75	0.14	3,500	8.6	1.6	22	•	•			
5010D12HS	Sleeve	12	6.0~13.8	0.16	5,300	13.2	3.3	32	•	•			
5010D12MS			6.0~13.8	0.08	4,500	11.0	2.5	28	•	•			
5010D12LS			7.0~13.8	0.07	3,500	8.6	1.6	22	•	•			
5010D12HB	Ball		6.0~13.8	0.16	5,300	13.2	3.3	32	•	•			
5010D12MB			6.0~13.8	0.08	4,500	11.0	2.5	28	•	•			
7025D12LB			7.0~13.8	0.07	3,500	8.6	1.6	22	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)