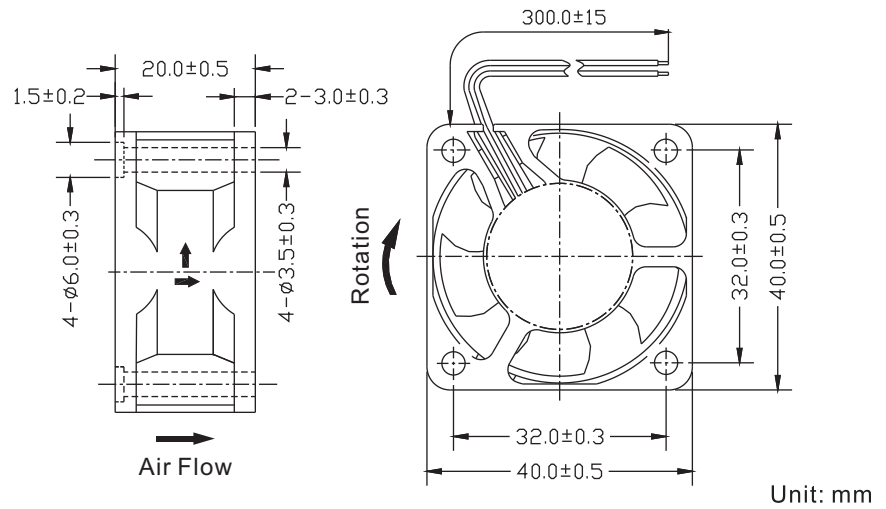
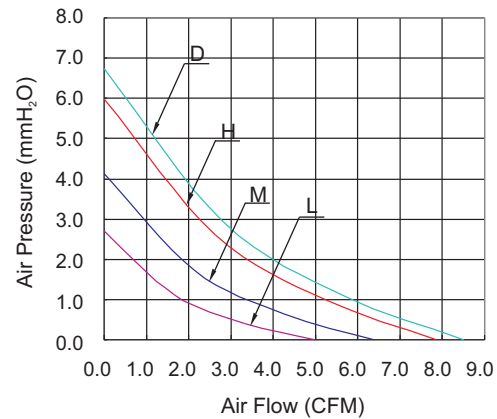


**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
4020D5DS	Sleeve	5	3.5~5.75	0.40	8,000	8.5	6.8	33	•	•			29
4020D5HS			3.5~5.75	0.28	7,500	7.9	6.0	31	•	•			
4020D5MS			3.5~5.75	0.25	6,200	6.4	4.1	26	•	•			
4020D5LS			3.5~5.75	0.20	5,000	5.0	2.7	22	•	•			
4020D5DB	Ball		3.5~5.75	0.40	8,000	8.5	6.8	33	•	•			
4020D5HB			3.5~5.75	0.28	7,500	7.9	6.0	31	•	•			
4020D5MB			3.5~5.75	0.25	6,200	6.4	4.1	26	•	•			
4020D5LB			3.5~5.75	0.20	5,000	5.0	2.7	22	•	•			
4020D12DS	Sleeve	12	6.0~13.8	0.12	8,000	8.5	6.8	33	•	•			
4020D12HS			6.0~13.8	0.12	7,500	7.9	6.0	31	•	•			
4020D12MS			6.0~13.8	0.10	6,200	6.4	4.1	26	•	•			
4020D12LS			6.0~13.8	0.06	5,000	5.0	2.7	22	•	•			
4020D12DB	Ball		6.0~13.8	0.12	8,000	8.5	6.8	33	•	•			
4020D12HB			6.0~13.8	0.12	7,500	7.9	6.0	31	•	•			
4020D12MB			6.0~13.8	0.10	6,200	6.4	4.1	26	•	•			
4020D12LB			6.0~13.8	0.06	5,000	5.0	2.7	22	•	•			
4020D24DS	Sleeve	24	12.0~27.6	0.09	8,000	8.5	6.8	33	•	•			
4020D24HS			12.0~27.6	0.07	7,500	7.9	6.0	31	•	•			
4020D24MS			12.0~27.6	0.06	6,200	6.4	4.1	26	•	•			
4020D24LS			12.0~27.6	0.05	5,000	5.0	2.7	22	•	•			
4020D24DB	Ball		12.0~27.6	0.09	8,000	8.5	6.8	33	•	•			
4020D24HB			12.0~27.6	0.07	7,500	7.9	6.0	31	•	•			
4020D24MB			12.0~27.6	0.06	6,200	6.4	4.1	26	•	•			
4020D24LB			12.0~27.6	0.05	5,000	5.0	2.7	22	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)