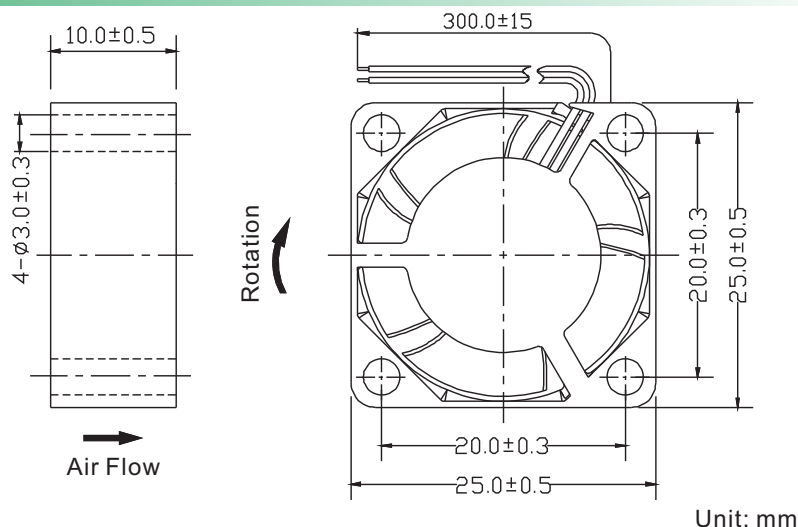
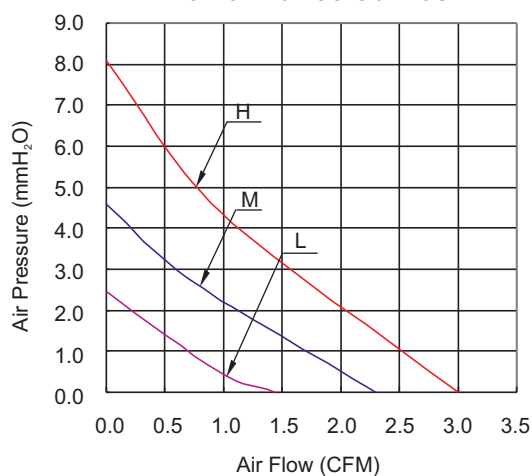


**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
2510D5HS	Sleeve	5	3.5~5.75	0.16	13,000	3.0	8.1	30	•	•			7
2510D5MS			3.5~5.75	0.12	10,000	2.3	4.6	23	•	•			
2510D5LS			3.5~5.75	0.08	7,000	1.4	2.5	19	•	•			
2510D5HM	Ball		3.5~5.75	0.16	13,000	3.0	8.1	30	•	•			
2510D5MB			3.5~5.75	0.12	10,000	2.3	4.6	23	•	•			
2510D5LM			3.5~5.75	0.08	7,000	1.4	2.5	19	•	•			
2510D12HS	Sleeve	12	6.0~13.8	0.10	13,000	3.0	8.1	30	•	•			
2510D12MS			6.0~13.8	0.08	10,000	2.3	4.6	23	•	•			
2510D12LS			6.0~13.8	0.06	7,000	1.4	2.5	19	•	•			
2510D12HB	Ball		6.0~13.8	0.10	13,000	3.0	8.1	30	•	•			
2510D12MB			6.0~13.8	0.08	10,000	2.3	4.6	23	•	•			
2510D12LB			6.0~13.8	0.06	7,000	1.4	2.5	19	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)