


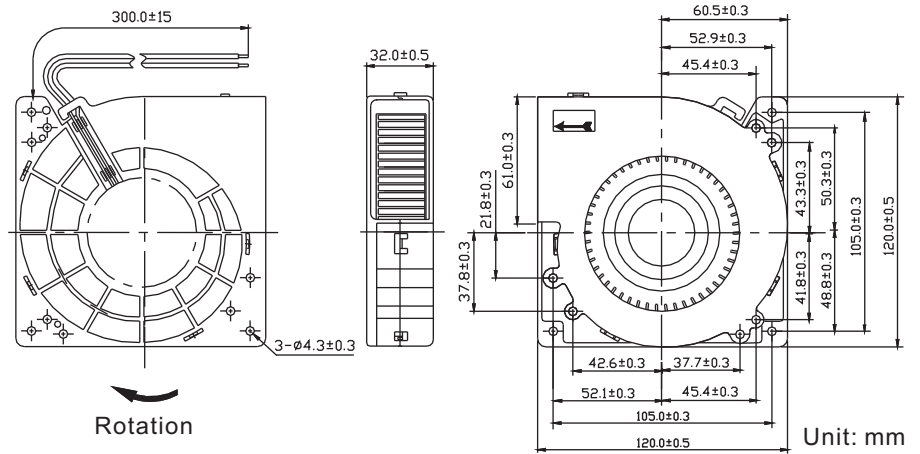


General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、
35%~85%RH
- Storage Temperature : -40°C~80°C、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

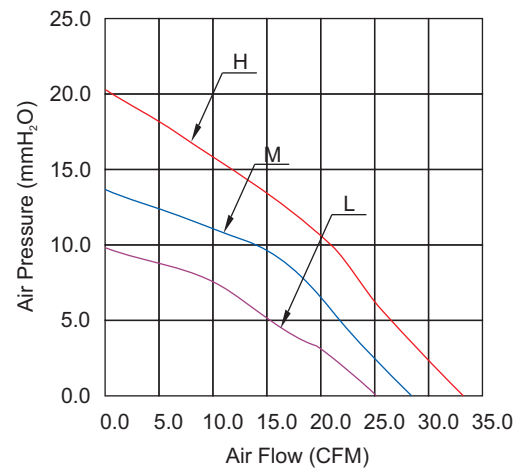

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
12032D12HB	Ball	12	6.0~13.8	0.87	2,100	33.1	20.1	51	•	•			240
12032D12MB			6.0~13.8	0.60	1,800	28.2	13.3	47	•	•			
12032D12LB			6.0~13.8	0.49	1,600	25.0	9.6	45	•	•			
12032D24HB		24	12.0~27.6	0.50	2,100	33.1	20.1	51	•	•			
12032D24MB			12.0~27.6	0.35	1,800	28.2	13.3	47	•	•			
12032D24LB			12.0~27.6	0.28	1,600	25.0	9.6	45	•	•			
12032D48HB		48	24.0~55.2	0.30	2,100	33.1	20.1	51	•	•			
12032D48MB			24.0~55.2	0.20	1,800	28.2	13.3	47	•	•			
12032D48LB			24.0~55.2	0.15	1,600	25.0	9.6	45	•	•			

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)