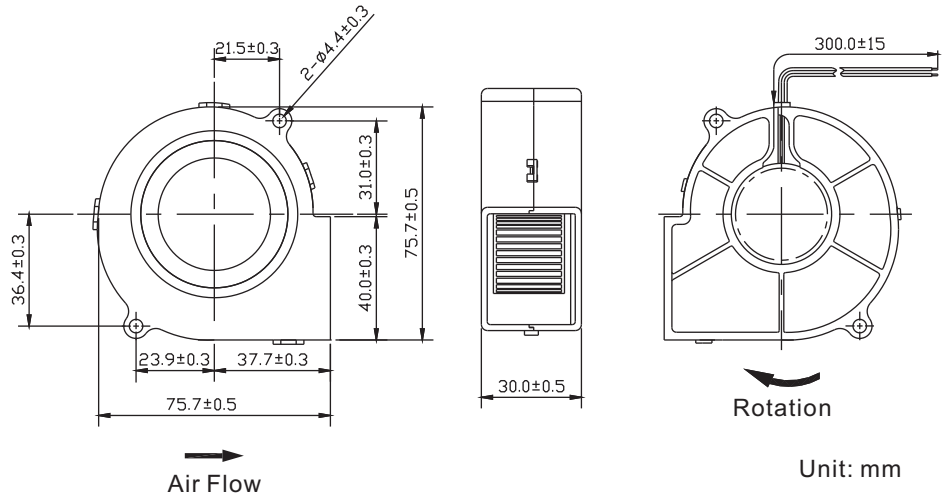
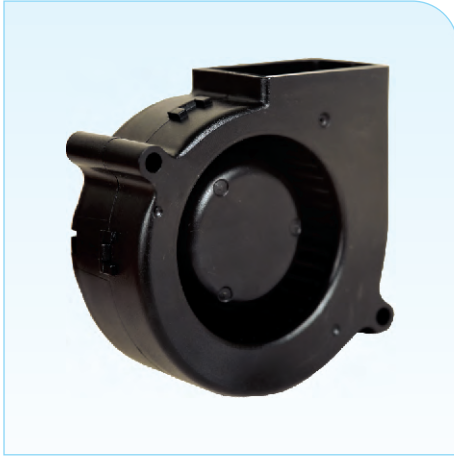



75x75x30mm (blower)

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

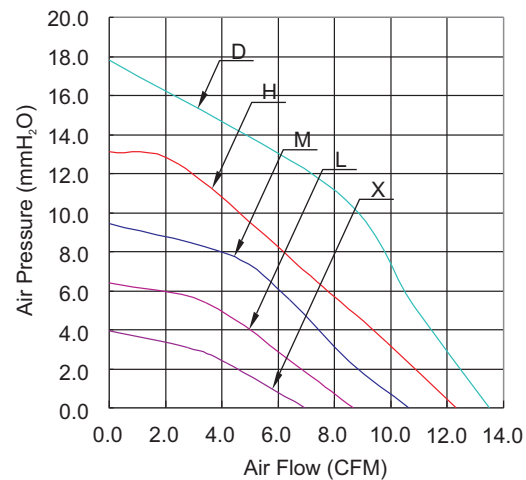Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
7530D12HS	Sleeve	12	6.0~13.8	0.50	3,800	13.5	17.7	45	•	•			87
7530D12MS			6.0~13.8	0.45	3,500	12.3	13.1	43	•	•			
7530D12LS			6.0~13.8	0.27	3,000	10.6	9.4	38	•	•			
7530D12HB	Ball		6.0~13.8	0.50	3,800	13.5	17.7	45	•	•			
7530D12MB			6.0~13.8	0.45	3,500	12.3	13.1	43	•	•			
7530D12LB			6.0~13.8	0.27	3,000	10.6	9.4	38	•	•			
7530D24HS	Sleeve	24	12.0~27.6	0.30	3,800	13.5	17.7	45	•	•			
7530D24MS			12.0~27.6	0.24	3,500	12.3	13.1	43	•	•			
7530D24LS			12.0~27.6	0.18	3,000	10.6	9.4	38	•	•			
7530D24HB	Ball		12.0~27.6	0.30	3,800	13.5	17.7	45	•	•			
7530D24MB			12.0~27.6	0.24	3,500	12.3	13.1	43	•	•			
7530D24LB			12.0~27.6	0.18	3,000	10.6	9.4	38	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)