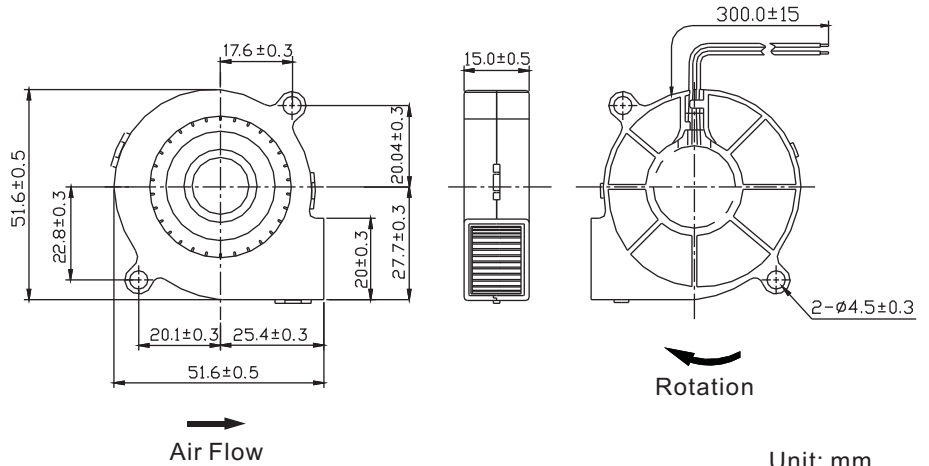
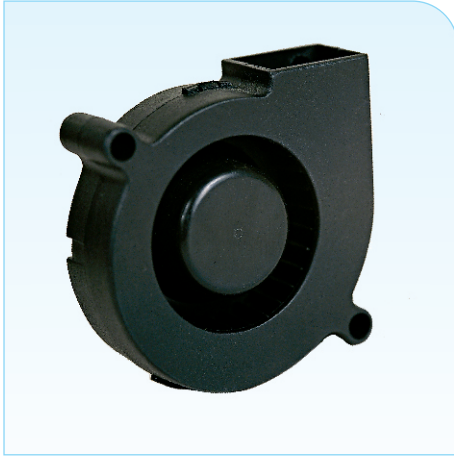



51x51x15mm (blower)

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

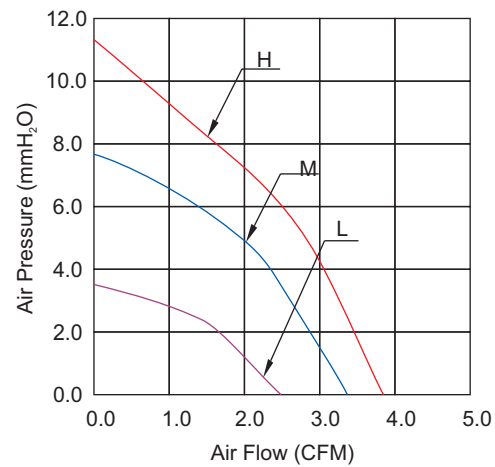Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
5015D5HS	Sleeve	5	3.5~5.75	0.33	4,500	3.8	11.3	37	•	•			26
5015D5MS			3.5~5.75	0.22	4,000	3.4	7.4	35	•	•			
5015D5LS			3.5~5.75	0.13	3,000	2.4	3.5	26	•	•			
5015D5HB	Ball		3.5~5.75	0.33	4,500	3.8	11.3	37	•	•			
5015D5MB			3.5~5.75	0.22	4,000	3.4	7.4	35	•	•			
5015D5LB			3.5~5.75	0.13	3,000	2.4	3.5	26	•	•			
5015D12HS	Sleeve	12	6.0~13.8	0.14	5,000	4.4	11.5	41	•	•			
5015D12MS			6.0~13.8	0.09	4,000	3.4	7.4	35	•	•			
5015D12LS			8.0~13.8	0.05	3,000	2.4	3.5	26	•	•			
5015D12HB	Ball		6.0~13.8	0.14	5,000	4.4	11.5	41	•	•			
5015D12MB			6.0~13.8	0.09	4,000	3.4	7.4	35	•	•			
5015D12LB			8.0~13.8	0.05	3,000	2.4	3.5	26	•	•			
5015D24HS	Sleeve	24	12.0~27.6	0.12	5,000	4.4	11.5	41	•	•			
5015D24MS			12.0~27.6	0.08	4,000	3.4	7.4	35	•	•			
5015D24LS			12.0~27.6	0.05	3,500	2.9	7.3	30	•	•			
5015D24HB	Ball		12.0~27.6	0.12	5,000	4.4	11.5	41	•	•			
5015D24MB			12.0~27.6	0.08	4,000	3.4	7.4	35	•	•			
5015D24LB			12.0~27.6	0.05	3,500	2.9	7.3	30	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)