




■ Dimensions Drawing

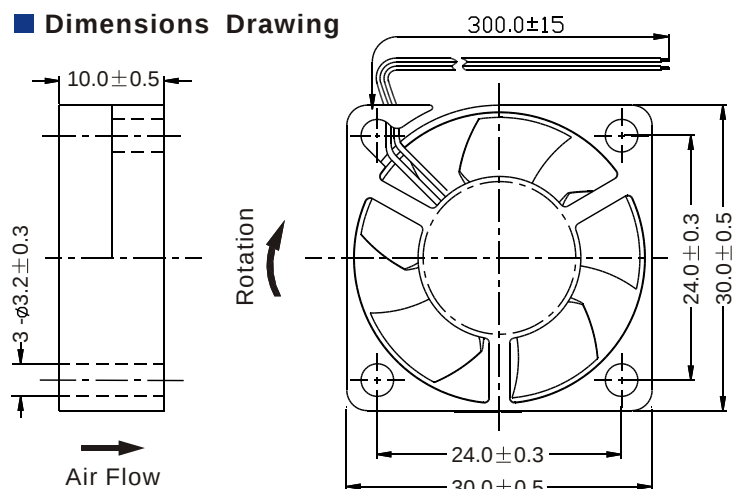


Unit: mm

General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C ~ 70°C ,
35% ~ 85%RH
- Storage Temperature : -40°C ~ 80°C ,
35% ~ 85%RH

■ Performance Curves

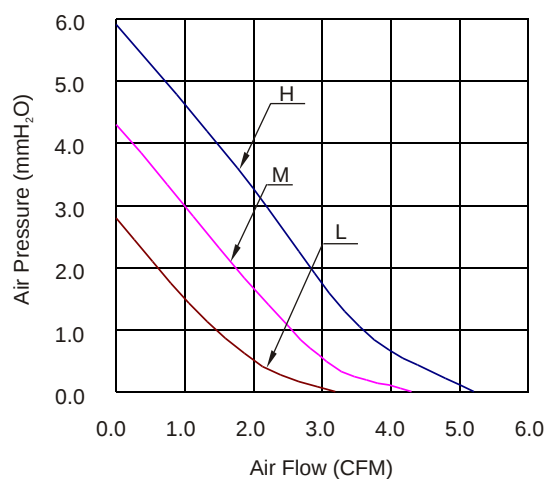

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
3010D5HS	Sleeve	5	4.0~5.75	0.20	11,000	5.2	5.9	32	•	•			8.5
3010D5MS			4.0~5.75	0.14	9,000	4.3	4.3	27	•	•			
3010D5LS			4.0~5.75	0.12	7,000	3.2	2.8	23	•	•			
3010D5HM	Ball		4.0~5.75	0.20	11,000	5.2	5.9	32	•	•			
3010D5MB			4.0~5.75	0.14	9,000	4.3	4.3	27	•	•			
3010D5LM			4.0~5.75	0.12	7,000	3.2	2.8	23	•	•			
3010D12HS	Sleeve	12	6.0~13.8	0.10	11,000	5.2	5.9	32	•	•			
3010D12MS			6.0~13.8	0.09	9,000	4.3	4.3	27	•	•			
3010D12LS			6.0~13.8	0.06	7,000	3.2	2.8	23	•	•			
3010D12HB	Ball		6.0~13.8	0.10	11,000	5.2	5.9	32	•	•			
3010D12MB			6.0~13.8	0.09	9,000	4.3	4.3	27	•	•			
3010D12LB			6.0~13.8	0.06	7,000	3.2	2.8	23	•	•			

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)