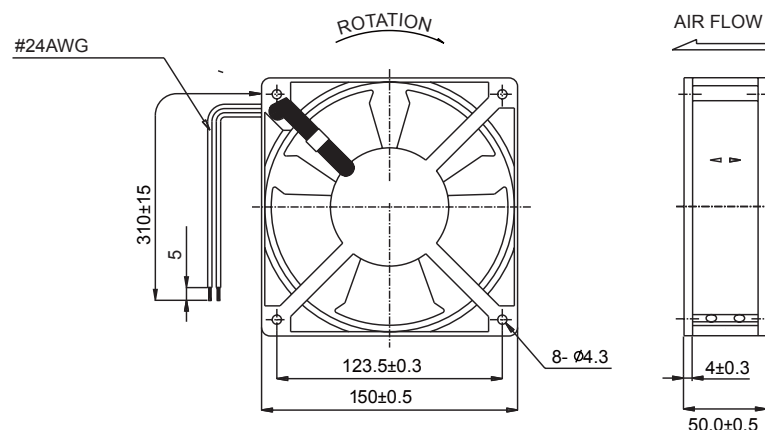



UNITS:mm

**General Specification:**

- Frame : Aluminum Alloy
- Impeller : Thermal Plastic , UL 94V-2
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10℃~70℃、
35%~85%RH
- Storage Temperature : -40℃~80℃、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

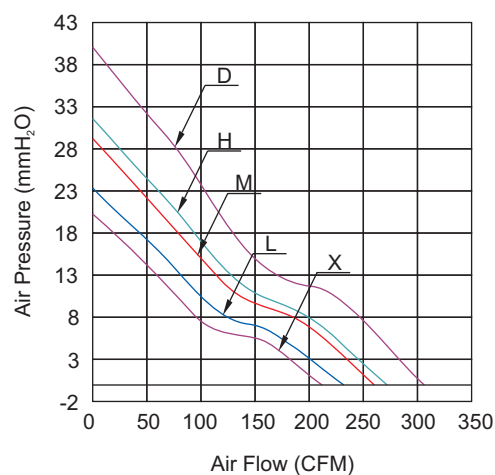Performance Curves

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Static Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
15050D12HS	Sleeve	12	9.0~13.8	3.50	3,800	260.7	29.0	62	•	•		•	735
15050D12MS			9.0~13.8	2.40	3,400	231.9	23.3	59	•	•		•	
15050D12LS			9.0~13.8	1.70	3,100	211.8	20.0	56	•	•		•	
15050D12HB	Ball		9.0~13.8	3.50	3,800	260.7	29.0	62	•	•		•	
15050D12MB			9.0~13.8	2.40	3,400	231.9	23.3	59	•	•		•	
15050D12LB			9.0~13.8	1.70	3,100	211.8	20.0	56	•	•		•	
15050D24DS	eeve	24	15.0~27.6	2.30	4,500	306.4	39.9	66	•	•		•	
15050D24HS			15.0~27.6	1.80	4,000	272.6	31.5	64	•	•		•	
15050D24MS			15.0~27.6	1.40	3,800	260.7	29.0	62	•	•		•	
15050D24LS			15.0~27.6	0.95	3,400	231.9	23.3	59	•	•		•	
15050D24XS			15.0~27.6	0.70	3,100	211.8	20.0	56	•	•		•	
15050D24DB	Ball		15.0~27.6	2.30	4,500	306.4	39.9	66	•	•		•	
15050D24HB			15.0~27.6	1.80	4,000	272.6	31.5	64	•	•		•	
15050D24MB			15.0~27.6	1.40	3,800	260.7	29.0	62	•	•		•	
15050D24LB			15.0~27.6	0.95	3,400	231.9	23.3	59	•	•		•	
15050D24XB			15.0~27.6	0.70	3,100	211.8	20.0	56	•	•		•	
15050D48MS	eeve	48	24.0~55.2	1.20	4,500	306.4	39.9	66	•	•		•	
15050D48DS			24.0~55.2	0.75	4,000	272.6	31.5	64	•	•		•	
15050D48HS			24.0~55.2	0.60	3,800	260.7	29.0	62	•	•		•	
15050D48LS			24.0~55.2	0.50	3,400	231.9	23.3	59	•	•		•	
15050D48XS			24.0~55.2	0.40	3,100	211.8	20.0	56	•	•		•	
15050D48DB	Ball		24.0~55.2	1.20	4,500	306.4	39.9	66	•	•		•	
15050D48HB			24.0~55.2	0.75	4,000	272.6	31.5	64	•	•		•	
15050D48MB			24.0~55.2	0.60	3,800	260.7	29.0	62	•	•		•	
15050D48LB			24.0~55.2	0.50	3,400	231.9	23.3	59	•	•		•	
15050D48XB			24.0~55.2	0.40	3,100	211.8	20.0	56	•	•		•	

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)