

Ø 250

JING DA FAN

外转子轴流风机

Axial fans



风机型号说明 Illustration of fan motor model

YWF 4 E - 350 S - P 102 / 34 - ★
① ②③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① 交流感应异步外转子风扇电动机
AC Induction asynchronous external rotor fan motor
- ② 电机极数
Motor poles
- ③ E-单相电容运转, D-三相异步运转
E-Single phase capacitor operation, D-Three phase asynchronous operation
- ④ 风叶直径
The diameter of the fan blade
- ⑤ 风向: S-吸风, B-吹风
Air direction: S-Sucking, B-Blowing
- ⑥ 此处空白表示标准型风机, "P" 表示通过ErP能效标准
The blank here means the standard fan motors, "P" means it passes ErP
- ⑦ 转子直径
The diameter of the rotor
- ⑧ 铁芯叠厚
The thickness of laminated core
- ⑨ 风机特征:
G-网罩, B-方框, T-圆筒, R-圆框, E-IP54, J-冷风机专用
Characteristics of the fan motor:
G-Grid, B-Square Frame, T-Cylinder, R-Round Frame, E-Insulation class IP54, J-Special for air cooler

● 能效数据说明 (符合ErP指令)

测量类别: A
能效类别: 静压
功率范围 (kW): $0.125 \leq P \leq 10$
能效指标计算: $\eta = 2.74 \times \ln(P) - 6.33 + 36$


● Energy efficiency data according to ErP directive

Measurement category: A
Efficiency category: Static
Power range (Pin kW): $0.125 \leq P \leq 10$
Target energy efficiency: $\eta = 2.74 \times \ln(P) - 6.33 + 36$

接线图 Wiring diagram

单相 Single phase

三相 Three phase

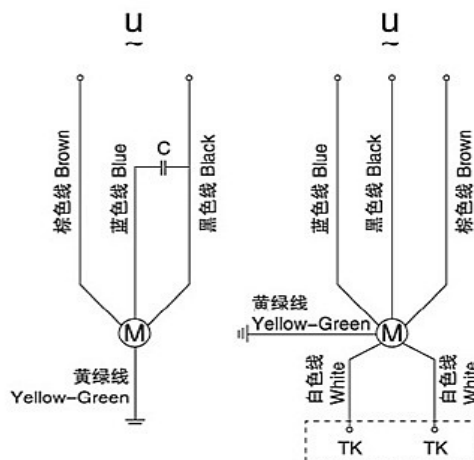

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)

Ø 250

JING DA FAN

外转子轴流风机 Axial fans



使用说明:

工作方式: S1

绝缘等级: B级 F级

环境温度: -30℃ ~ 60℃

应用范围:

2D-250 380V/50Hz 0~90Pa (20Pa-850m³/h)


2E-250 220V/50Hz 0~90Pa (20Pa-830m³/h)

2E-250 120V/60Hz 0~60Pa (20Pa-950m³/h)

4D-250 380V/50Hz 0~60Pa (20Pa-540m³/h)

4E-250 220V/50Hz 0~60Pa (20Pa-520m³/h)

4E-250 120V/60Hz 0~60Pa (20Pa-600m³/h)

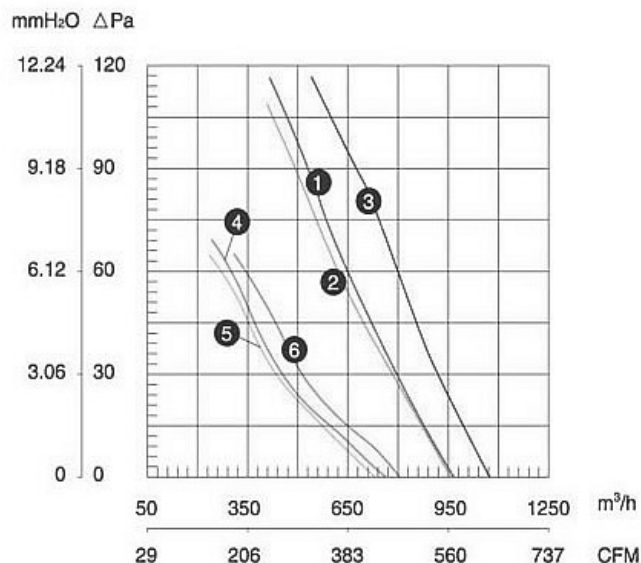

				VOLTAGE 额定电压 V
JD-YWF-2D-250-S-92/25-G	JD-YWF-2D-250-S-92/25-T	JD-YWF-2D-250-S-92/25-B	JD-YWF-2D-250-S-92/25-R	380
JD-YWF-2E-250-S-92/25-G	JD-YWF-2E-250-S-92/25-T	JD-YWF-2E-250-S-92/25-B	JD-YWF-2E-250-S-92/25-R	220
JD-YWF-2E-250-S-92/25-G	JD-YWF-2E-250-S-92/25-T	JD-YWF-2E-250-S-92/25-B	JD-YWF-2E-250-S-92/25-R	120
JD-YWF-4D-250-S-92/25-G	JD-YWF-4D-250-S-92/25-T	JD-YWF-4D-250-S-92/25-B	JD-YWF-4D-250-S-92/25-R	380
JD-YWF-4E-250-S-92/25-G	JD-YWF-4E-250-S-92/25-T	JD-YWF-4E-250-S-92/25-B	JD-YWF-4E-250-S-92/25-R	220
JD-YWF-4E-250-S-92/25-G	JD-YWF-4E-250-S-92/25-T	JD-YWF-4E-250-S-92/25-B	JD-YWF-4E-250-S-92/25-R	120

FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO. ON THE CURVE
50	0.22	80	2500	970	/	60	2.5	CCC CE	①
50	0.40	80	2400	960	3	60	2.5	CCC CE	②
60	0.95	120	2850	1070	10	60	2.5		③
50	0.17	60	1400	770	/	55	2.5	CCC CE	④
50	0.23	50	1380	730	2	55	2.5	CCC CE	⑤
60	0.55	65	1600	800	8	55	2.5		⑥

* all model could be customized on voltage or any other requirements to fit your need

* [http:// www.jingdafan.com](http://www.jingdafan.com)








Ø 250

JING DA FAN

外转子轴流风机 Axial fans



UNITS:mm

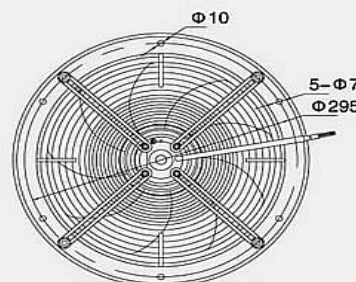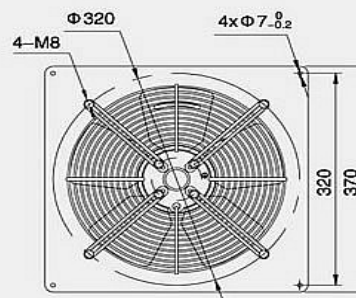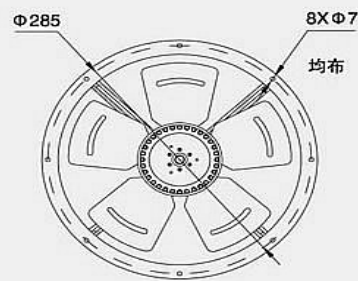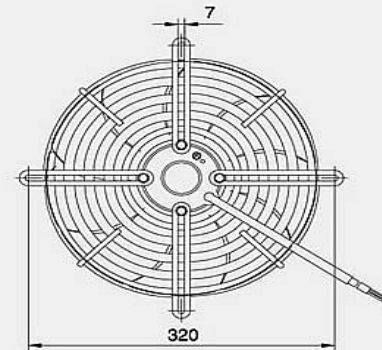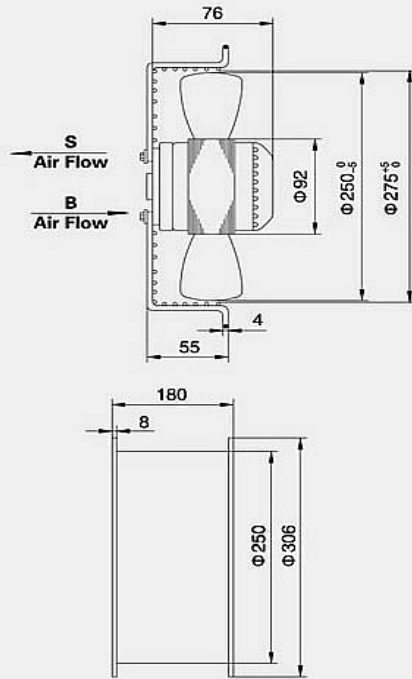

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)