

172 x 150 x 51 mm





JING DA FAN

120 -170 CFM

Frame : Aluminum alloy





Model	P/N	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
JD17251AC	17250A1HSL	○ BALL	115	50/60	0.45/0.42	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A1HST	○ Sleeve	115	50/60	0.45/0.42	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A1MSL	○ BALL	115	50/60	0.40/0.35	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A1MST	○ Sleeve	115	50/60	0.40/0.35	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A1LSL	○ BALL	115	50/60	0.37/0.32	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A1LST	○ Sleeve	115	50/60	0.37/0.32	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A1HBL	⊙ BALL	115	50/60	0.45/0.42	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A1HBT	⊙ Sleeve	115	50/60	0.45/0.42	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A1MBL	⊙ BALL	115	50/60	0.40/0.35	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A1MBT	⊙ Sleeve	115	50/60	0.40/0.35	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A1LBL	⊙ BALL	115	50/60	0.37/0.32	40/37	2100/2250	125/145	0.33/0.41	44/46	900
JD17251AC	17250A1LBT	⊙ Sleeve	115	50/60	0.37/0.32	40/37	2100/2250	125/145	0.33/0.41	44/46	900



Airflow (CFM)

UNITS:mm

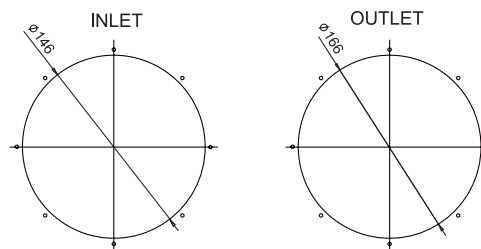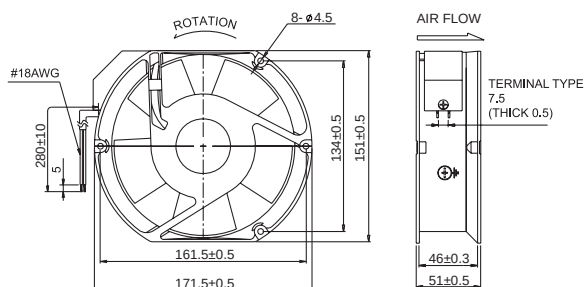

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)

172 x 150 x 51 mm





JING DA FAN

120 -170 CFM

Frame : Aluminum alloy






Model	P/N	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
JD17251AC	17250A2HSL	○ BALL	220/240	50/60	0.24/0.21	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A2HST	○ SLEEVE	220/240	50/60	0.24/0.21	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A2MSL	○ BALL	220/240	50/60	0.22/0.19	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A2MST	○ SLEEVE	220/240	50/60	0.22/0.19	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A2LSL	○ BALL	220/240	50/60	0.20/0.18	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A2LST	○ SLEEVE	220/240	50/60	0.20/0.18	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A2HBL	⊙ BALL	220/240	50/60	0.24/0.21	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A2HBT	⊙ SLEEVE	220/240	50/60	0.24/0.21	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A2MBL	⊙ BALL	220/240	50/60	0.22/0.19	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A2MBT	⊙ SLEEVE	220/240	50/60	0.22/0.19	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A2LBL	⊙ BALL	220/240	50/60	0.20/0.18	40/37	2100/2250	125/145	0.33/0.41	44/46	900
JD17251AC	17250A2LBT	⊙ SLEEVE	220/240	50/60	0.20/0.18	40/37	2100/2250	125/145	0.33/0.41	44/46	900



Airflow (CFM)

UNITS:mm

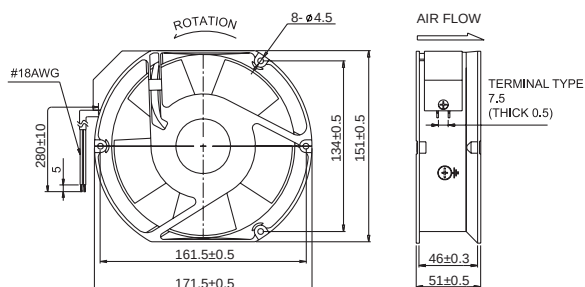

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)

172 x 150 x 51 mm





JING DA FAN

120 -170 CFM

Frame : Aluminum alloy





Model	P/N	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
JD17251AC	17250A3HSL	○ BALL	380	50/60	0.15/0.13	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A3HST	○ Sleeve	380	50/60	0.15/0.13	47/42	2450/2600	145/165	0.42/0.56	52/54	900
JD17251AC	17250A3MSL	○ BALL	380	50/60	0.13/0.11	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A3MST	○ Sleeve	380	50/60	0.13/0.11	43/38	2150/2350	135/155	0.37/0.50	48/50	900
JD17251AC	17250A3LSL	○ BALL	380	50/60	0.11/0.09	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A3LST	○ Sleeve	380	50/60	0.11/0.09	40/37	2000/2200	120/140	0.32/0.40	45/47	900
JD17251AC	17250A3HBL	⊙ BALL	380	50/60	0.15/0.13	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A3HBT	⊙ Sleeve	380	50/60	0.15/0.13	47/42	2500/2700	150/170	0.43/0.58	51/53	900
JD17251AC	17250A3MBL	⊙ BALL	380	50/60	0.13/0.11	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A3MBT	⊙ Sleeve	380	50/60	0.13/0.11	43/38	2200/2400	140/160	0.38/0.51	47/49	900
JD17251AC	17250A3LBL	⊙ BALL	380	50/60	0.11/0.09	40/37	2100/2250	125/145	0.33/0.41	44/46	900
JD17251AC	17250A3LBT	⊙ Sleeve	380	50/60	0.11/0.09	40/37	2100/2250	125/145	0.33/0.41	44/46	900



Airflow (CFM)

UNITS:mm

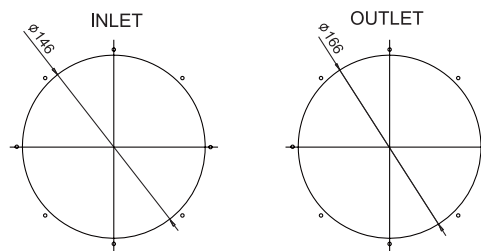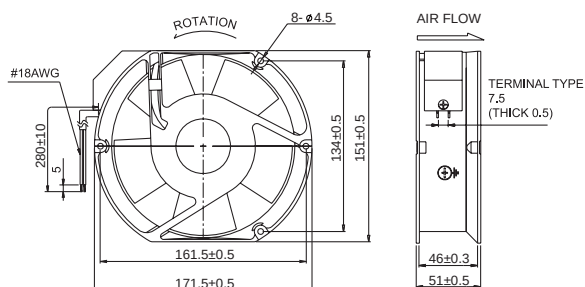

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)